SMALL BOAT CHANNEL

use transit for course (Spire & Radio Mast)

TRANSIT

Look for Radio Mast & Spire transit

Clearing bearing keep Old Harry Light @ 082°(M) or less

GULLPOINT

Look for Old Harry Light

Keep depth above 6.6m (5m contour + height of tide)

ANCHORAGE

Alter course to port @
PHM (leave to starboard)

Look for PHM / (likely off starboard bow) 0.4M (c5mins)

Alter course to port when on transit - 054°(M)

1.2M (clomins)


Alter course to port when Old Harry light at 082°(M)

1.2M (c10mins)

Safe side

125°(M) - Initial bearing



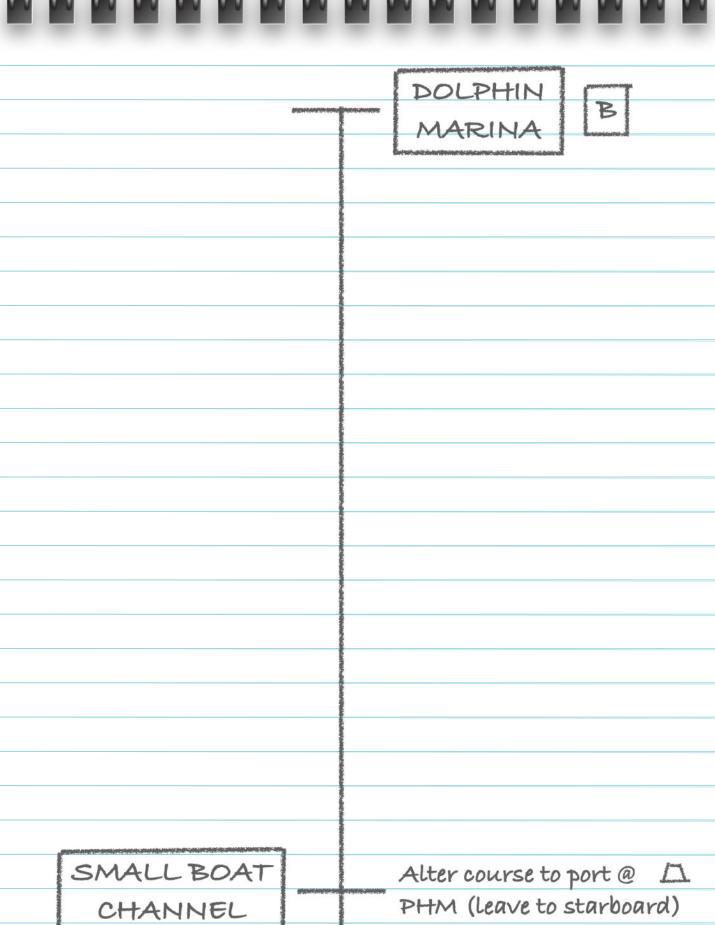



PHM (leave to starboard)